


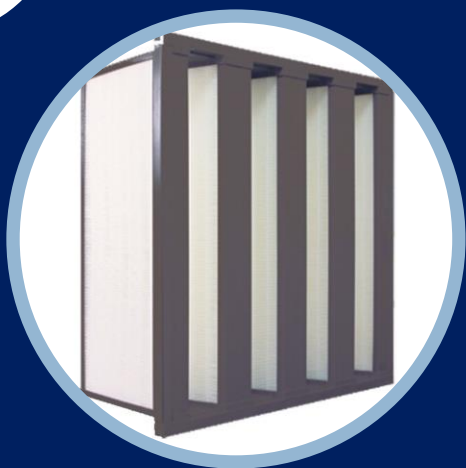

COMPACT V FILTER

Type	: Compact V Filter
Frame	: kunststof
Filterklasse ISO 16890	: ePM10 60% / ePM1 55% ePM1 75% / ePM1 80%
Filterklasse EN779:2012	: M6 / F7 / F8 / F9 / H10 / H13
Aanbevolen eindweerstand	: 450 Pa
Maximale temperatuur	: 80 °C

Filter medium	Afmeting B x H x D (mm)	Filterklasse ISO 16890	Filterklasse EN779:2012	Airflow (m³/h)
Minipleat	592 x 592 x 292	ePM10 60%	M6	4250
Minipleat	592 x 490 x 292	ePM10 60%	M6	3450
Minipleat	592 x 287 x 292	ePM10 60%	M6	2125
Minipleat	592 x 592 x 292	ePM1 55%	F7	4250
Minipleat	592 x 490 x 292	ePM1 55%	F7	3450
Minipleat	592 x 287 x 292	ePM1 55%	F7	2125
Minipleat	592 x 592 x 292	ePM1 75%	F8	4250
Minipleat	592 x 490 x 292	ePM1 75%	F8	3450
Minipleat	592 x 287 x 292	ePM1 75%	F8	2125
Minipleat	592 x 592 x 292	ePM1 80%	F9	4250
Minipleat	592 x 490 x 292	ePM1 80%	F9	3450
Minipleat	592 x 287 x 292	ePM1 80%	F9	2125

Overige afmetingen zijn op aanvraag te verkrijgen.

CONTACT

+31-(0)513-625 325

info@eag-filters.nl

www.eag-filters.nl



European Airfilter Group
EAG-FILTERS